
METALWORKS™

Tegular smooth texture



TrioGuard™ **Dirt-Resistant** Coating





Now, get Total Acoustics™ performance with MetalWorks Tegular perforated panels – excellent noise reduction and sound blocking in one system.

KEY SELECTION ATTRIBUTES

- Get total noise control and design flexibility with Total Acoustics ceiling panels: NRC + CAC = Total Acoustics performance
- Available with TrioGuard[™] coating that resists dirt, bacteria, mold, mildew, and color fading
- · Panels can be used to create continuous looks or clouds using Axiom® or Effects Wood Looks trim
- · MetalWorks Tegular panels available for TechZone® ceiling systems applications
- · Standard perforations available to enhance acoustical performance and design aesthetics
- · Outstanding NRC with acoustical fleece or infill panel (0.65 - 0.90)
- BioAcoustic[™] infill panels can enhance acoustics and contribute to LEED® credits
- 18" x 18" MetalWorks Tegular panels available for Metaphors® Coffers

COLORS Due to printing limitations, shade may vary from actual product.





with TrioGuard"

Coating (WH3G)





(SG)



Gun Metal

Grey (MY)



Effects Maple

(FXMP)



Effects Cherry

Effects Dark Cherry (FXDC)



Effects Walnut (FXWN)



Effects Walnut

Custom Colors Available

(FXCH) **DETAILS**








- 1. MetalWorks Tegular Microperforated
- 2. MetalWorks Tegular Extra Microperforated
- 3. Effects Wood Looks Tegular Extra Microperforated



(Unperforated)



(Microperforated)



Microperforated)



Available



36

N/A

N/A

N/A

37

35

N/A

N/A

Total Acoustics¹

BETTER

(1)

BEST

0))

GOOD

((())

METALWORKS™

Tegular smooth texture

Dots represent high PERFORMANCE level of performance. **VISUAL SELECTION Dimensions** Impact Scrub Wash Edge Profile Item Nominal W x L Perforations Soil Light Reflect Number (Inches) METALWORKS™ Flush Tegular (with acoustical fleece) (White Only) 0.77 (M1, M3) 0.61 (M2) 15/16" Flush 24 x 24" П M1, M2 Tegular METALWORKS 5/16" Square Tegular (with acoustical fleece) 15/16" Square **6462**___ 24 x 24" M1, M2, M3 0.77 (M1, M3) 0.61 (M2) Tegular 9/16" Square 6464 24 x 24" Tegular METALWORKS 5/8" Square Tegular (with acoustical fleece) 15/16" Square **6463**____ † 24 x 24" 0.77 (M1, M3) Tegular 0.61 (M2) **6465**_ _ _ _ † 9/16" Square 24 x 24" Tegular

Micro-perforated 0.70 N/A 5823 Extra 2820 0.60 40

5479

LOCATION DEPENDENT

Perforation

М1

М3

ACOUSTICAL INFORMATION

Performance determined by perforation size

Panel Number

NOTE: Available with TrioGuard™ Coating 8200100

5479

5823

1713

2820

8200100

N/A

0.90

0.85

0.85


0.70

0.80

0.70

0.70

¹ Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. GOOD (NRC 0.60-0.65; CAC 35+) BETTER (NRC 0.70-0.75; CAC 35+) BEST (NRC 0.80+; CAC 35+)




- item number (e.g., 6461 <u>M 1 W H 3 G</u>).

 Available in Effects™ Wood Looks finishes. NOTE: Perforation M2 not available in Effects finishes as a standard option.
- When specifying or ordering, include the appropriate perforation, letter color, and, if needed, coating suffix with the "S" Service item with extended lead time.

TOTAL ACOUSTICS™ PANEL INSTALLATION










METALWORKS™

Tegular smooth texture

FACETED INSTALLATION

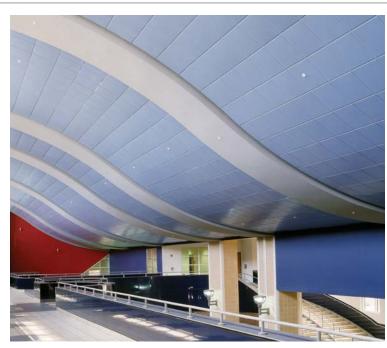




MetalWorks[™] Tegular faceted panels

MetalWorks™ Tegular faceted panels

FACETED PERIMETER DETAILS

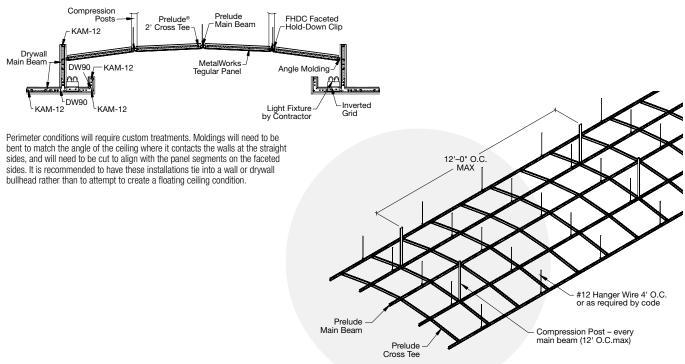



METALWORKS™

Tegular smooth texture

Spreader

Channel

.

PERIMETER INSTALLATION DETAILS (Spreader channel inserts into "C" channel.)

5/16" Square Tegular Suspension System -7835 "C" Channel 7835SC

Shim 1/4" Above

Molding Face

5/8" Square Tegular Suspension System ¬ 7835 "C" Ch 7835SC Shim 9/16" Above Spreader Channel Molding Face


Suspension System 7835 "C" Channel -----7835SC Spreader Channel

Flush Tegular

ACCESSORIES			
Item Number*	Description	Dimensions (Inches)	Pieces/Carton
5342	2" Effects™ Wood Looks Trim	120 x 3/4 x 2"	6
5344	4" Effects Wood Looks Trim	120 x 4 x 4"	6
5346	6" Effects Wood Looks Trim	120 x 6 x 6"	6
6096+	Edge Cap for Cut Tegular Panels for 15/16" suspension systems (not available in Effects colors, order in Black (BL))	Nominal 24" length	50
6099+	Edge Cap for Cut Tegular Panels for 9/16" suspension systems (not available in Effects colors, order in Black (BL))	Nominal 24" length	50
84008*	Single Single Slot Air Diffuser (not available in Effects colors, order in Black (BL))	24 x 24"	1
FXSPTHDC	Effects™ Hold Down Clip for Cut Panel Installations	N/A	10
FHDC	Faceted Hold Down Clip	N/A	10
1713	School Zone® Fine Fissured™ Square Lay-in Acoustic Panel	24 x 24 x 3/4"	14
2820	Calla® Square Lay-in Acoustic Panel	24 x 24 x 1"	10
5479	BioAcoustic™ Infill Panel (Beige – Matte)	24 x 24 x 5/8"	12
5823	BioAcoustic™ Infill Panel (Black – Matte)	24 x 24 x 5/8"	12
8200100	1" Fiberglass Infill Bag (Black - Gloss)	24 x 24"	12

[◆] When specifying or ordering, include the appropriate 2-letter color suffix with the item number (e.g., 6098 <u>B</u> <u>L</u>).

SUSPENSION SYSTEMS



^{*} For more information about TrioGuard™ coating for suspension system refer to Prelude® XL®, Suprafine® XL®, and angle molding visit our website at armstrongceilings.com Prelude and Suprafine suspension system are available in coordinating colors. All other suspension systems are available in standard White only. Other colors available as special order.

PHYSICAL DATA

Material

Electrogalvanized Steel - 0.021" thickness

Surface Finish Factory-applied powder-coated finish (post-coated for color and/or TrioGuard™ coating).
Exterior: Factory-applied powder-coated finish (post-coated on both sides). Effects finish on face only. Product tested to be fade-resistant up to 10 years. Custom colors also available. Contact TechLine for custom color matching requests at 1 877 ARMSTRONG.

Fire Performance ASTM E84 and CAN/ULC S102. Flame Spread Index 25 or less. Smoke Developed Index 50 or less.

> TechLine / 1 877 ARMSTRONG armstrongceilings.com/metalworks (search: metalworks tegular) BPCS-5109-1016

Acoustical Performance

CAC testing conducted using Prelude® XL® for 15/16" edge detail and Silhouette® for 9/16" edge detail.

ASTM E1264 Classification

Fire Class – Class A Unperforated – Type XX, Pattern G Perforated – Type XX, Pattern C

Installation Consideration

For Tegular faceted installations, a Faceted Hold Down Clip must be used, which will limit accessibility. If accessibility is required in a faceted application, use Vector® panels. For information about faceted applications with square Tegular panels in 15/16" suspension system, refer to installation instructions on our web site at armstrongceilings.com/installation

LEED® is a registered trademark of the U.S. Green Building Council All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates $\, \, \otimes \,$ 2016 AWI Licensing LLC Printed in the United States of America

Seismic Restraint

MetalWorks Tegular panels have been engineered, tested, and approved for application in all seismic areas when installed per Armstrong Ceilings installation instructions.

WarrantyDetails at armstrongceilings.com/warranty

Weight; Square Feet/Carton 6461M2 - 0.75 lbs/SF; 64 SF/Ctn 6461M1 - 0.80 lbs/SF; 64 SF/Ctn 6462M2 - 0.86 lbs/SF; 64 SF/Ctn 6462M1, 6463M2, 6465M2, 6462M3 - 0.89 lbs/SF; 64 SF/Ctn

6464M2, 6463M1, 6465M1, 6464M3 – 0.92 lbs/SF; 64 SF/Ctn 6464M1 – 0.97 lbs/SF; 64 SF/Ctn

